


**VICINITY MAP**

LOCATE HYDRANT SO THAT  
DRIVE IS NOT BLOCKED  
WHEN CONNECTED.  
( SEE DETAILS #2 & #3 )  
CONNECTION IS ON THE SIDE  
OF THE TRUCK

PROVIDE PROJECT NAME  
PROJECT ADDRESS, CITY,  
ASSESSORS PARCEL NUMBER  
APPLICANT NAME  
APPLICANT PHONE  
PERMIT NO.

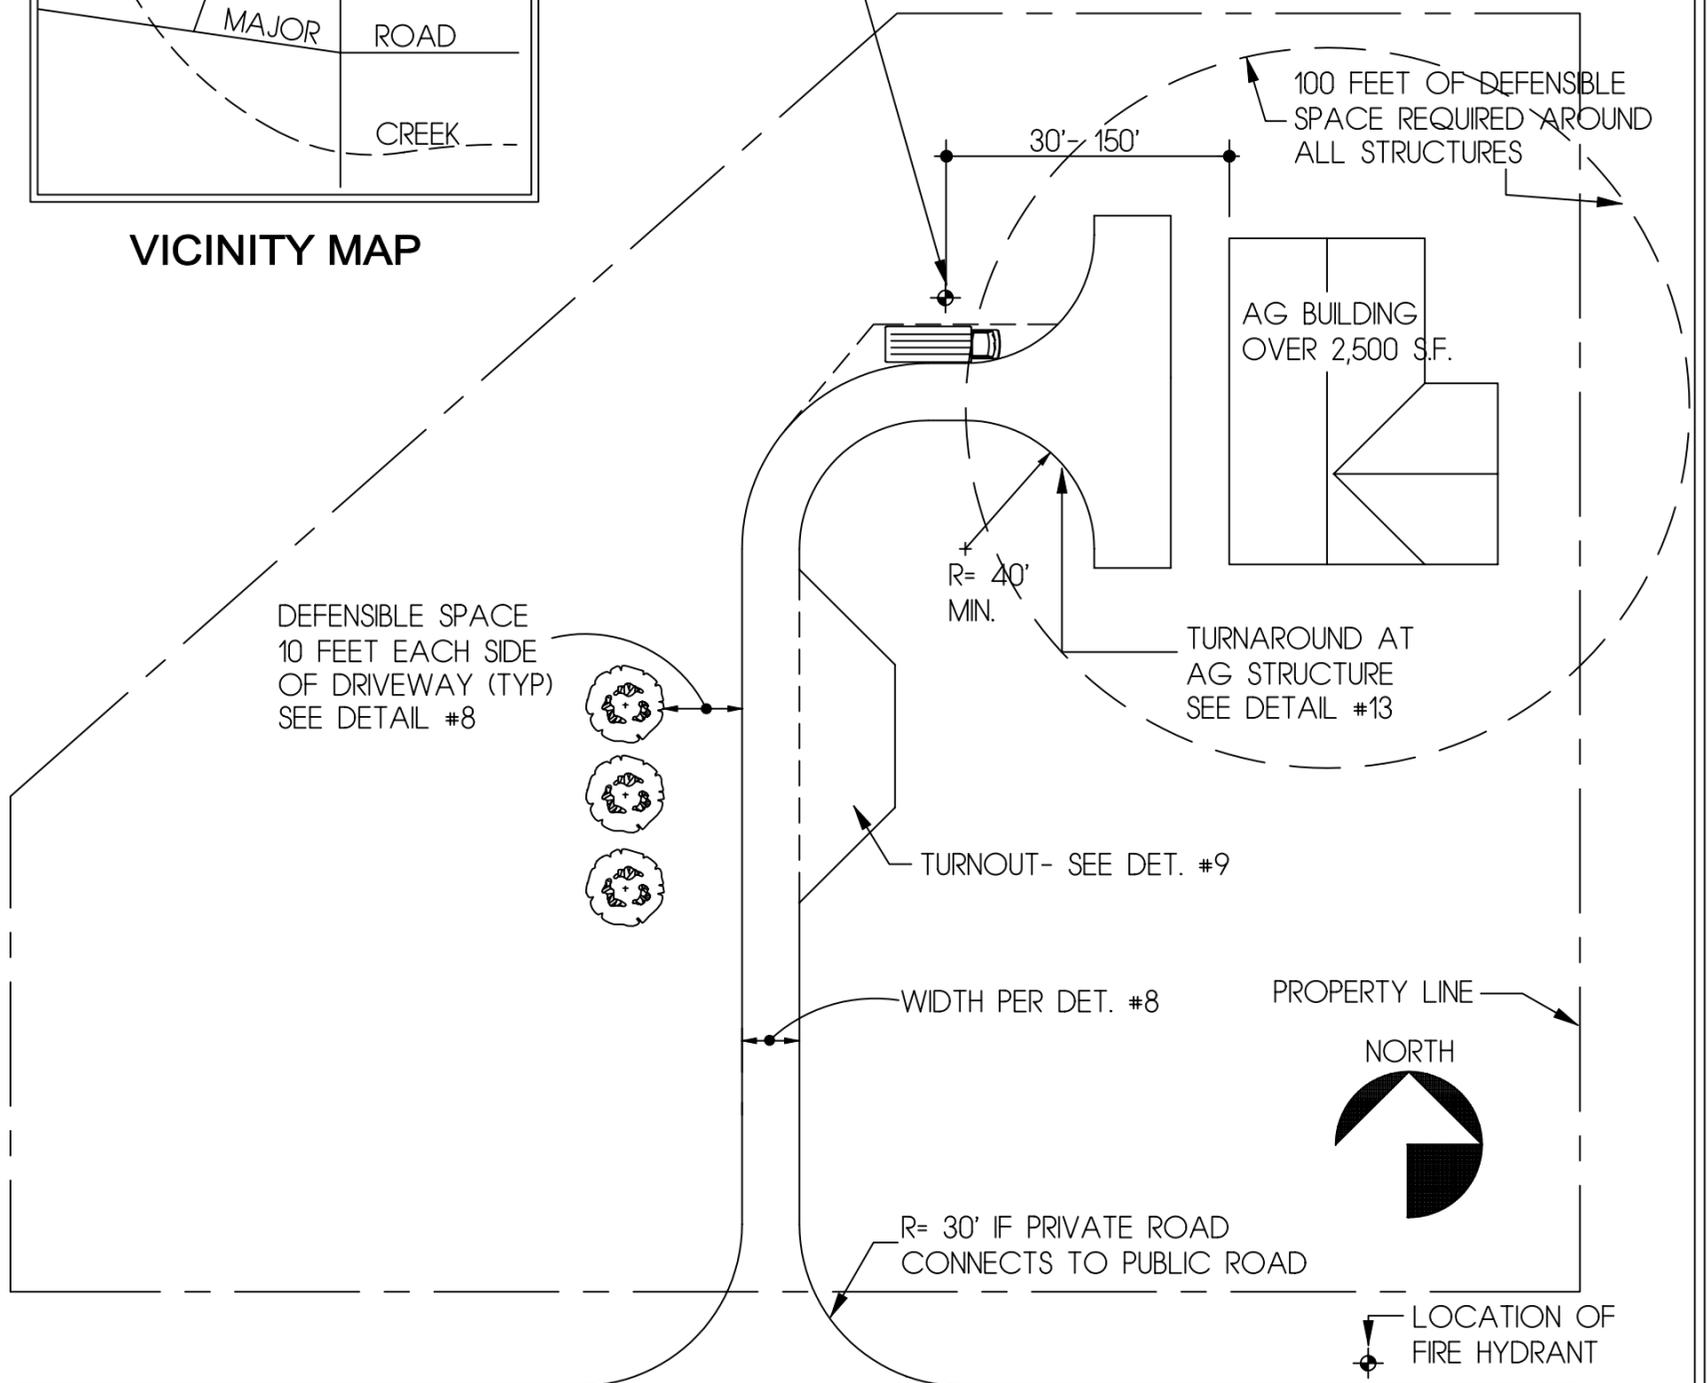

**ROAD NAME**

- Address Numbers shall be minimum 4" in height
- 100 feet of defensible space is required around all structures.
- 10 feet of defensible space is required on each side of driveway
- 2500 gallons of water storage is required for agricultural buildings between 2500 square feet and 6000 square feet delivered by wet draft hydrant. See detail #2 & #3.
- 12,000 gallons of water storage is required for agricultural buildings greater than 6000 square feet and less than 12,000 square feet delivered by wet draft hydrant. See detail #2 & #3.

**AG BUILDING SAMPLE SITE PLAN**

**CAL FIRE**  
Napa County Fire Department  
1199 BIG TREE ROAD  
ST. HELENA, CALIFORNIA 94574  
OFFICE PHONE (707) 967-1419 FAX (707) 967-1474

**FIRE SAFE STANDARDS**

1/50" = 1-0"	<b>16</b>
SCALE	
--	
REVISION DATE	DRAWING NO. 16