


SIGNAGE SIZE AND LOCATION OF ADDRESSES

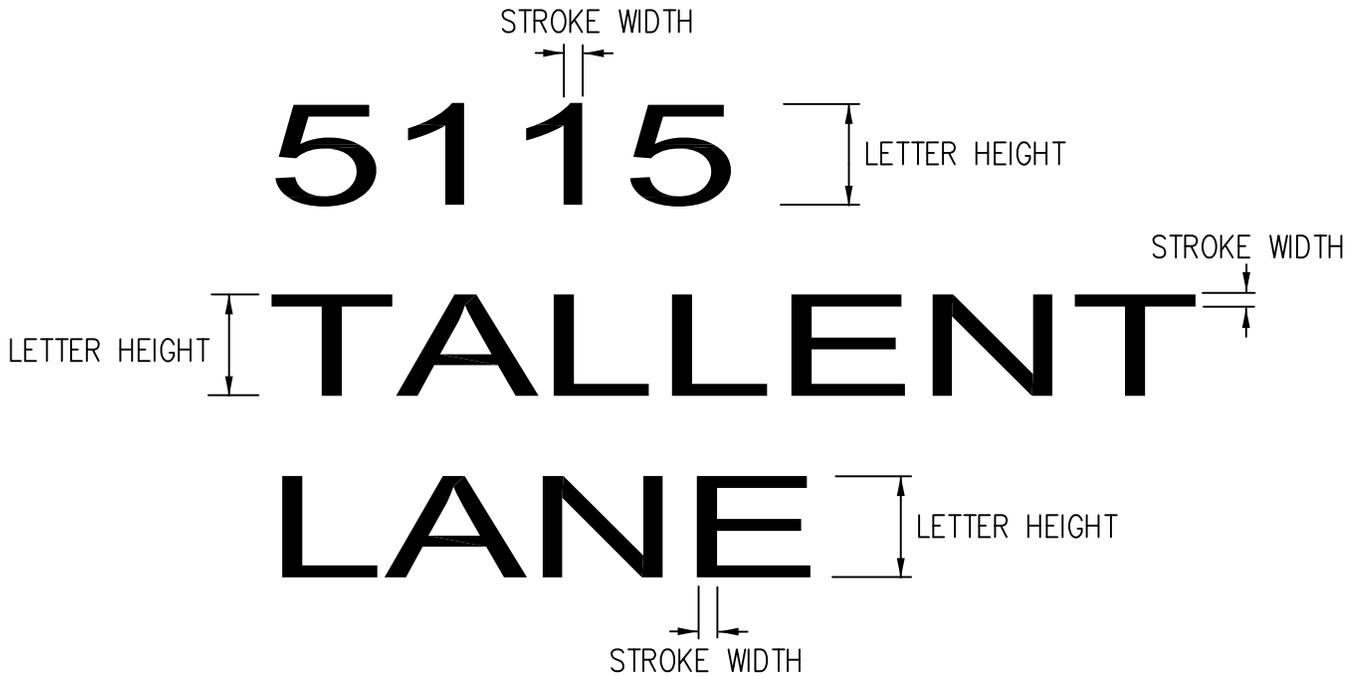

	MINIMUM LETTER HEIGHT	MINIMUM STROKE WIDTH
RESIDENTIAL	4"	1/2"
COMMERCIAL	6"	3/4"
INDUSTRIAL	12"	1-1/2"

NOTE: LETTERING SHALL BE REFLECTORIZED AND CONTRASTING WITH THE BACKGROUND COLOR OF THE SIGN.

ADDRESS SIGNAGE NOTES

1. ALL BUILDINGS SHALL HAVE A PERMANENTLY POSTED ADDRESS, WHICH SHALL BE PLACED AT EACH DRIVEWAY ENTRANCE AND VISIBLE FROM BOTH DIRECTIONS OF TRAVEL ALONG THE ROAD. IN ALL CASES, THE ADDRESS SHALL BE POSTED AT THE BEGINNING OF CONSTRUCTION AND SHALL BE MAINTAINED THEREAFTER, AND THE ADDRESS SHALL BE VISIBLE AND LEGIBLE FROM THE ROAD ON WHICH THE ADDRESS IS LOCATED.
2. ADDRESS SIGNS ALONG ONE-WAY ROADS SHALL BE VISIBLE FROM BOTH THE INTENDED DIRECTION OF TRAVEL AND THE OPPOSITE DIRECTION.
3. WHERE MULTIPLE ADDRESSES ARE REQUIRED AT A SINGLE DRIVEWAY, THEY SHALL BE MOUNTED ON A SINGLE POST.
4. WHERE A ROADWAY PROVIDES ACCESS SOLELY TO A SINGLE COMMERCIAL OR INDUSTRIAL BUSINESS, THE ADDRESS SIGN SHALL BE PLACED AT THE NEAREST ROAD INTERSECTION PROVIDING ACCESS TO THAT SITE.

NOT TO SCALE

NAPA COUNTY
FIRE DEPARTMENT

ADDRESS SIGNAGE

CAL FIRE
FIRE SAFE STANDARDS

SEPTEMBER 2016